



The rest of the Inet system

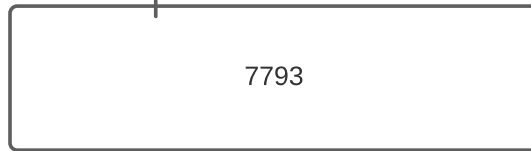


RS485

Typical 7793 arrangement

The rest of the Inet system  
Reads and Writes to the MR's  
(virtual MR's)

The rest of the Inet system

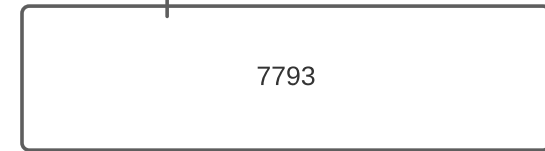

RS485



gateway replaces the trunk of MR's with a set of virtual MR's inside the gateway

You read and write to them as you would to any real MR's

Gateway connects to a 7793 - Connect the gateway to the 7793's RS485 port where you would normally connect a trunk of MR's

