Jan. 12, 2021



©CHIPKIN

FS-8705-104 – PassiveXPath PassiveXPath

DESCRIPTION

The PassiveXPath Driver allows the FieldServer to transfer XML data from devices over Ethernet. The PassiveXPath Driver uses TCP. The port is configurable and the driver supports opening multiple TCP ports to receive XML data.

The FieldServer emulates a passive Server, listening on the configured TCP port. When configured, the FieldServer listens for XML data. Upon receiving the data, the data is parsed based on the configured XPaths and the values are extracted. These values are stored on the FieldServer to be mapped to other protocols or simply to be viewed.

CONNECTION FACTS

This table summarizes the number of connections this driver supports for each of its modes.

FIELDSERVER MODE	NODES	COMMENTS	
Client	0	The FieldServer cannot be configured as a PassiveXPath client	
Server	*	The server mode supports setting up a passive server that can receive XML data on multiple TCP ports	

FORMAL DRIVER TYPE

Ethernet

Passive Server

COMPATIBILITY

FIELDSERVER MODEL	COMPATIBLE
QuickServer FS-QS-10xx	Yes
QuickServer FS-QS-12xx	Yes
QuickServer FS-QS-20xx	Yes
QuickServer FS-QS-22xx	Yes

CONNECTION INFORMATION


Connection Type: Ethernet

Ethernet Speeds Supported: 10Base-T, 100Base-T



CONNECTION CONFIGURATIONS

This block diagram lists common network connections that can monitor XML data using other protocols like Modbus® RTU/TCP, BACnet® and HTTP.

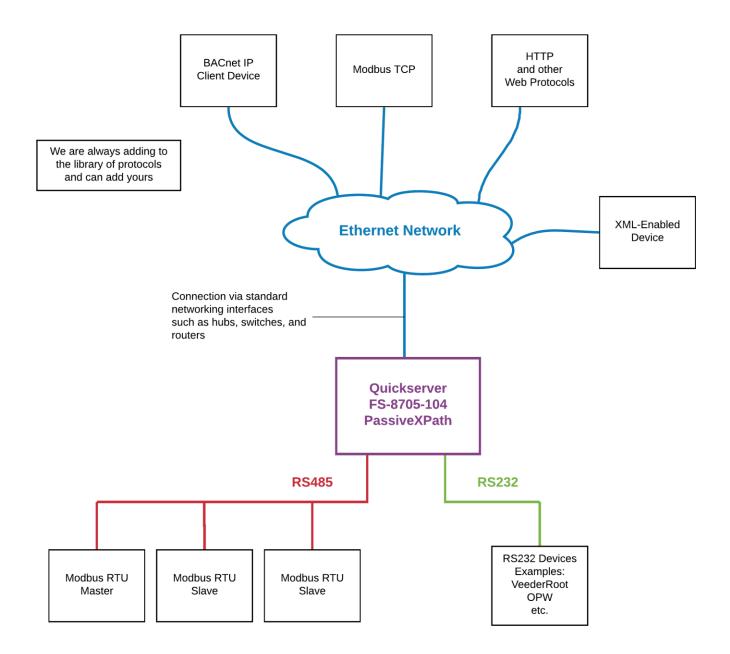

COMMUNICATION FUNCTIONS

The FieldServer is configured as a passive server. This means that it listens for any XML data packets that are sent to one of its opened ports. As such, the FieldServer must be installed and configured to be on the same network as the device sending the XML data.

The PassiveXPath driver is a read only driver and cannot control or change any data on the devices that sent the XML data.



CUSTOMER SUPPORT

PassiveXPath Driver for FieldServer was developed by Chipkin, and we are proud to provide support for our products. For technical support, sales and customer service, please call us at 1 (866) 383-1657.

Thanks for choosing Chipkin's products and integration services to meet your building and industrial automation requirements!

Chipkin[™] is a building and industrial automation protocol expert. We develop, configure, install and support gateways (protocol converters), data loggers and remote monitor and controlling applications. Founded in October 2000, Chipkin provides expert solutions for converting BACnet®, Modbus®, and LonWorks®—to name just a few—and enabling interfaces for HVAC, fire, siren, intercom, lighting, transportation and fuel systems. The high-quality products we offer (including those from other vendors) interface with Simplex™, Notifier™, McQuay™, GE™ and many others—so you can rest assured that we will select the most appropriate solution for your application.

With Chipkin you are buying a solution. Our configuration expertise in this field combined with free BACnet and other tools ensure your success; and our customer support via phone, email and remote desktop tools means that we are there when you need us. Chipkin is a small responsive company, and we live or die by the quality of our service—and with offices in two time zones—we can provide support when you need it. Give us a call now!

Sales and Customer Service

Toll free: 1-866-383-1657

Email: salesgroup1@chipkin.com

All contents are Copyright © 2000-2020 Chipkin Automation Systems. All rights reserved. This document is Chipkin Public Information.



APPENDIX A: DEVICES TESTED

This tables summarize the XML-enabled devices that have been tested. Other devices may be supported.

DEVICE	TESTED (FACTORY/SITE)
Sample XML Client	Factory

REVISION HISTORY

This table summarizes the update history for this protocol data sheet. Please contact Chipkin by phone or email for an updated version of this document.

DATE	RESP.	DRIVER VERSION	DOCUMENT REVISION	COMMENTS
15 Dec 2020	ACF	0.0.2	0.1	Created document