

CAS2500-05-UL – BACnetEth Data Client

- Collect and log data from BACnet Ethernet Enabled devices. BACnet Ethernet is also known as BACnet 802.3 It predates BACnetIP
- View Log and current data using the onboard web server.
- Serves data to other applications using XML or HTTP
- Upload log files for later review.
- Simple and easy to use and configure.



Description

Connects to BACnet IP devices to read data. The data and transactions are logged. The log files are available and can be transferred to other computers. Current data can be monitored by remote systems running applications that can issue HTTP or SOAP/XMP GET requests - such applications can be easily developed by end users. Of course, this data is available using an Internet Browser such as Internet Explorer or Google Chrome. Connection parameters, device parameters and data parameters are configurable.

Logging

Log records of each Modbus read and response transactions are maintained in the file system. Log record with time stamps of data returned by Modbus devices are maintained in the file system. These files are (zipped) human readable data. Log files can be uploaded to a remote PC

using HTTP. When file space runs low, the data client overwrites older files.

Data Serving

The current value of any/all data objects reads from the BACnet Devices can be monitored remotely using HTTP or XML by using HTTP GET requests or XML/SOAP requests.

 2011© Chipkin Automation Systems, 3495 Cambie St Box 211, Vancouver, BC, Canada, V5Z 4R3

 ■ Tel: 1866 383-1657, ■ Fax: (416) 915-4024 ■

 Email: dfs@chipkin.com
 Website: www.chipkin.com



CAS 2500-05-UL - BACnetEth Data Client Data Logger and HTTP/XML Server

Product Data Sheet

BACnet Ethernet

Connect to multiple BACnetEth devices. Device instance is configurable Data objects, types and properties are configurable.

Device Specifications

Environmental Parameters


Operating Temperature: 0 to 70 C Humidity: 5% to 95% (non-condensing) Dimensions 4.2" x 3.25" x 1" **Power Supply** Power: 5-24VDC Power Adapter: 60W, VAC 100~240V adapter Compliance CE, FCC UL and ULc approved RoHS, Lead-Free Interfaces 1xRS485 Port 1xRS232 (Debug Port) 1xMicros SD Card 1x 10/100/1000 RJ45 Network Memory/Operation 2MBytes flash memory, 8MBytes of SDRAM LEDs: Link, Speed/Data, Power Case Aluminum with textured paint



CAS 2500-05-UL - BACnetEth Data Client Data Logger and HTTP/XML Server

Product Data Sheet

Connection Configurations

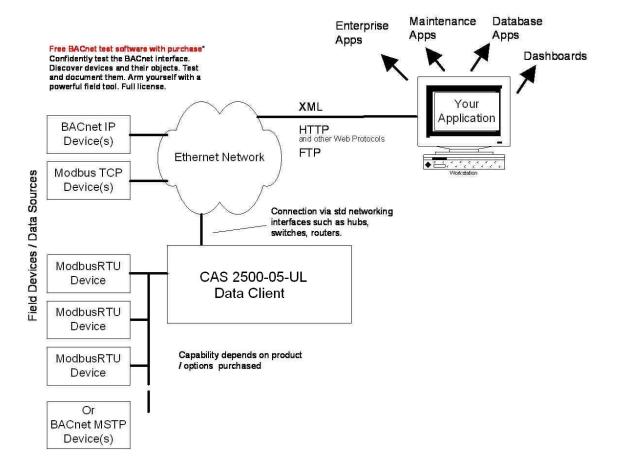

2011© Chipkin Automation Systems, 3495 Cambie St Box 211, Vancouver, BC, Canada, V5Z 4R3 ■ Tel: 1866 383-1657, ■ Fax: (416) 915-4024 ■ Email: dfs@chipkin.com Page 2 of 2